| TABLE | UNPLATING.REEL | PLATING | PART NO. | DESCRIPTION | | | | |
|---|---|---|---|---|---|---|---|---|
| | | | | UNDERPLATING | A Point | B Point | C Point | PIECE |
| 1 | H5800000A | H5860000A | H5860B20A | CU FLASH | AG 80u" | AG FLASH | AG 80u" | 20PIN |

| REVISION | | | |
|---|---|---|---|
| REV | DESCRIPTION | BY | DATE |
| A | NEW DRAWING | J.S.SHEU | 01/12/09' |

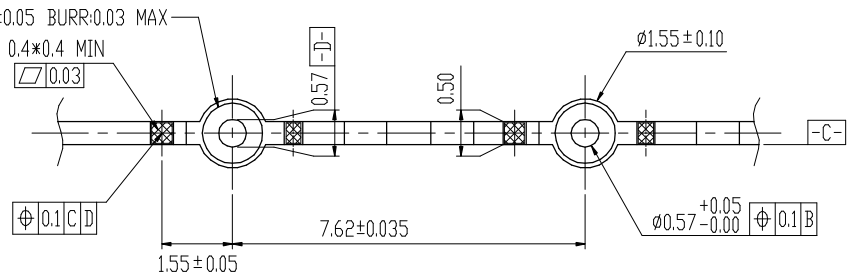


"B" S=6/1




S=15/1
SECTION "A-A"

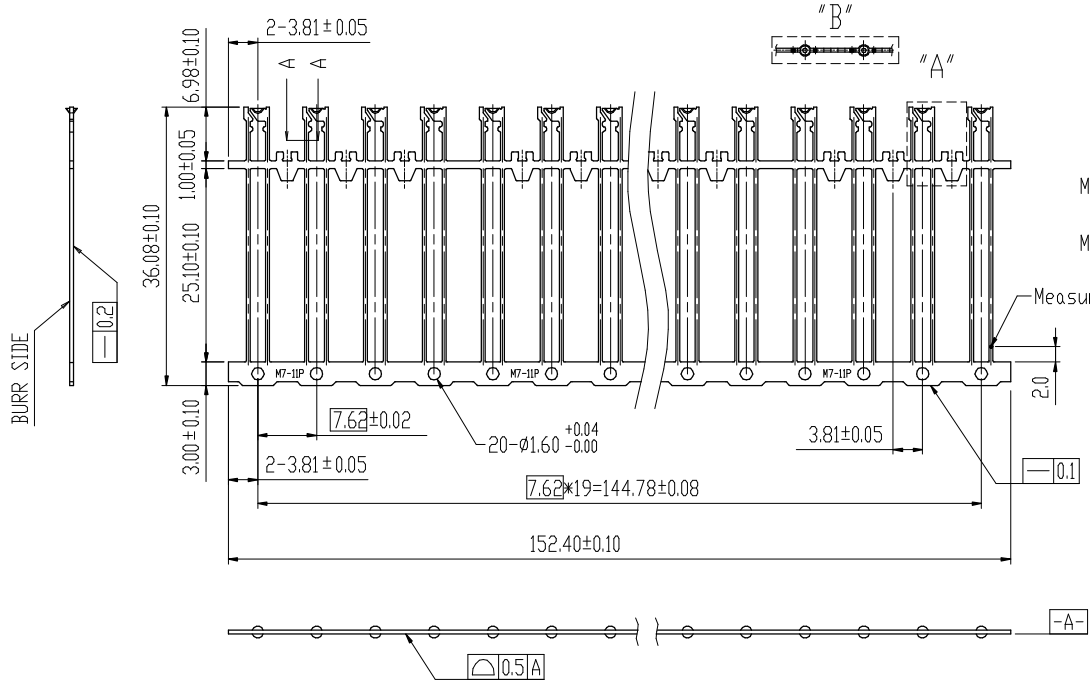


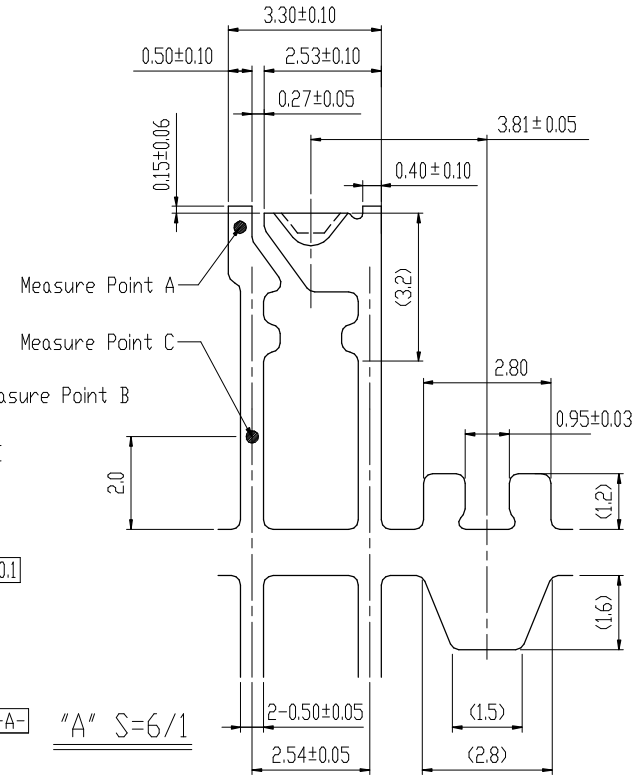


"A" S=6/1

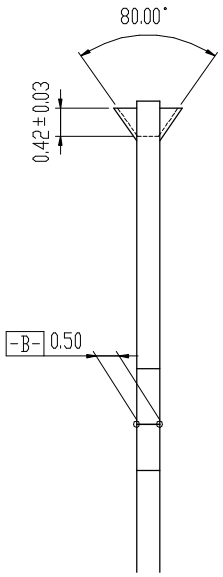


NOTE:
1. MATERIAL: 0.50±0.025 THICK SPCC-SD.
2. BURR: 0.05 MAX. UNLESS OTHERWISE SPECIFIED.
3. RADIUS: 0.30 MAX. ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
4. CAN NOT BE DISCOLOR AFTER BY 160° BAKING FOR 2 HOURS.

| | | | | | |
|---|---|---|---|---|---|
| ANGLES 0°±2°0' | MM | DR J.S.SHEU | DATE 01/12/09' | MAT'L SEE NOTE 1 | CHIALIN PRECISION INDUSTRIAL CO.,LTD. |
| | 0.0±0.13 | CHK J.S.SHEU | 01/12/09' | FINISH SEE PART NO. TABLE | DWG TYPE C / TITLE 2003M7-11P / REV A |
| | 0.00±0.05 | ENGR | | DWG.NO. M0344 | SCALE 1:1 / SIZE A4 / PART NO. E03044-H58XXXXXA / SHT 1 OF 2 |
| | 0.000±0.03 | APPD | | | |