

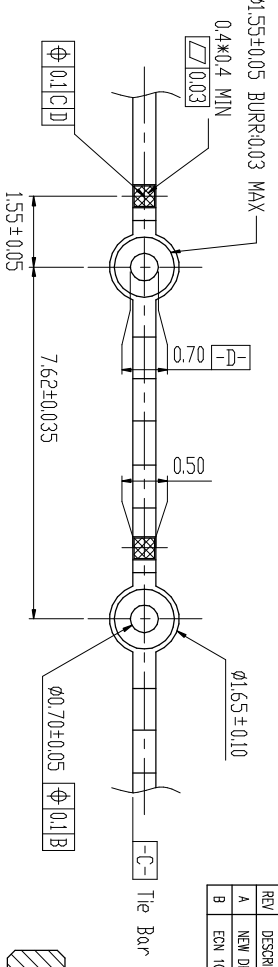


TABLE	UNPLATING/REEL	PLATING	PART NO.	DESCRIPTION			PIECE
1	J1800000A	J1860000A	J1860A20A	A Point	B Point	C Point	
	J1800000A	J1860000A	J1860A30A	CU FLASH	AG 80u"	AG 80u"	20PIN
				AG 80u"	AG FLASH	AG 80u"	30PIN

REVISION			
REV	DESCRIPTION	BY	DATE
A	NEW DRAWING	J.S.SHEU	01/15/09
B	EN 1066-002	JOE	06/09/10

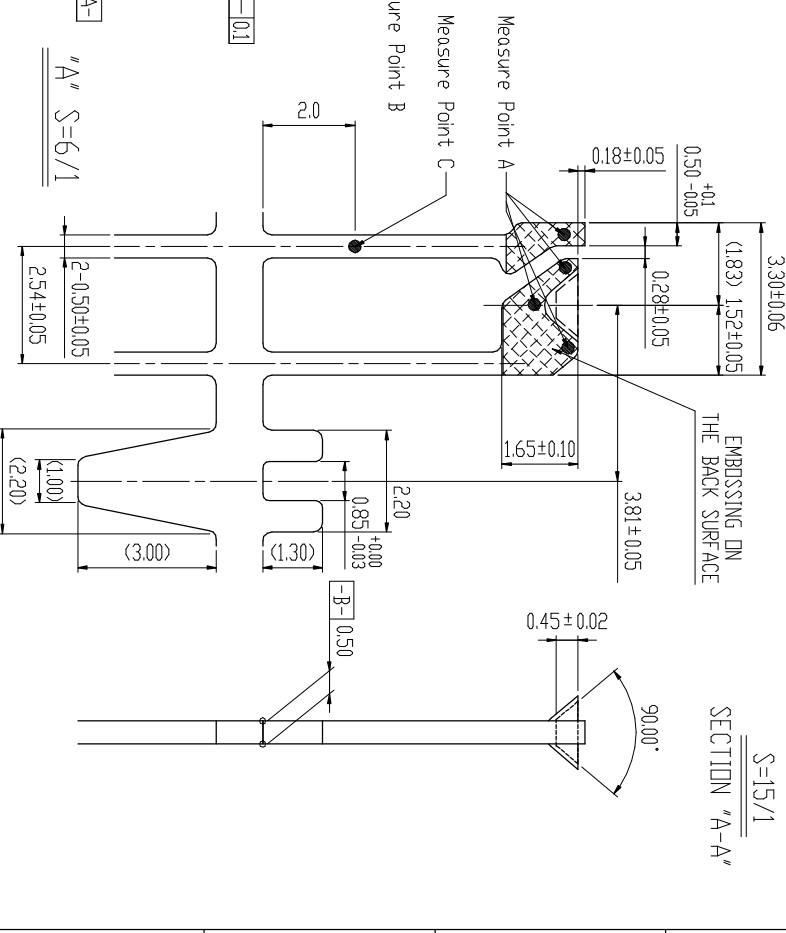


SECTION "A-A"
S=15/1
4-C0.10

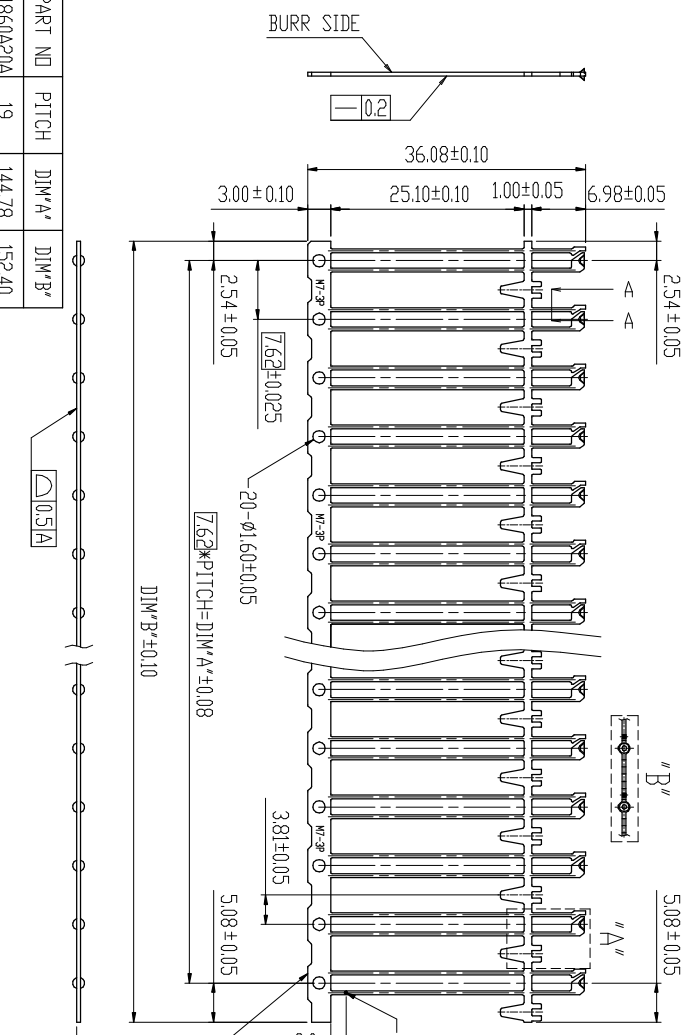

PART NO	PITCH	DIM'A"	DIM'B"
J1860A20A	19	144.78	152.40
J1860A30A	29	220.98	228.60

- NOTE:
1. MATERIAL: 0.50±0.025 THICK SPCC-S.D.
 2. BURR: 0.05 MAX. UNLESS OTHERWISE SPECIFIED.
 3. RADIUS: 0.30 MAX. ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
 4. CAN NOT BE DISCOLD AFTER BY 160° BAKING FOR 2 HOURS.



ANGLES 0°±20'

M/M

DR

JOE

DATE

MAT'L

SEE NOTE 1

CHAIN PRECISION INDUSTRIAL CO., LTD.

0.0±0.13

CHK

JOE

06/09/10'

FINISH

SEE PART NO. TABLE

2003M7-3P

0.00±0.05

ENGR

DWG. NO.

M0344

REV B

0.000±0.03

APPD

SCALE 1:1 SIZE A4 PART NO. E03044-J18XXXXXA SH1 1 OF 2