




A B C D E F G H I

REVISION			
REV	DESCRIPTION	BY	DATE
A	NEW DRAWING	J.S.SHEU	04/12/06
B	MODIFY P/N	J.S.SHEU	01/02/07

SCATION "C-C" S=15/1

"C" S=10/1

"B" S=10/1

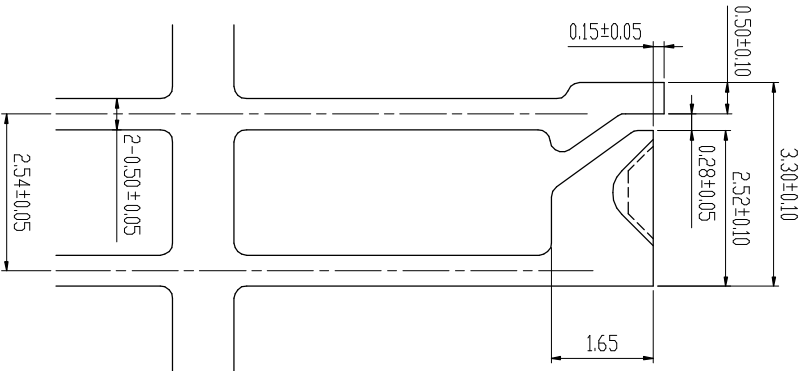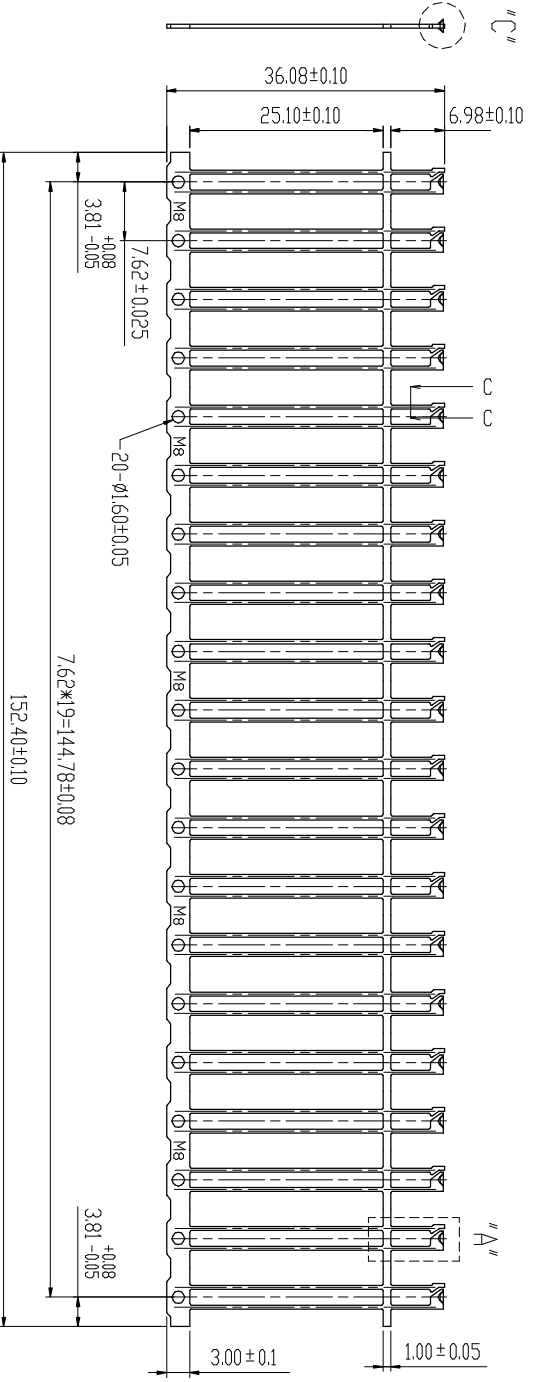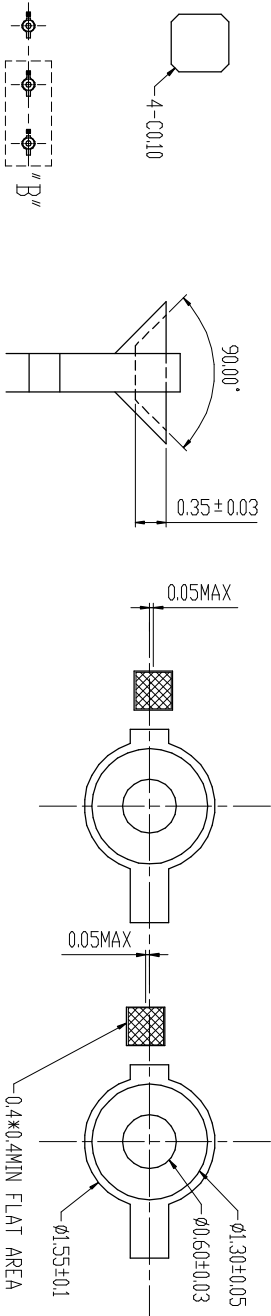

"A" S=8/1

NOTE:

1. MATERIAL: 0.50±0.025 THICK SPEC-SD.
2. BURR: 0.05MAX. UNLESS OTHERWISE SPECIFIED.
3. RADIUS: 0.30 MAX. ON ALL SHARP CORNER UNLESS OTHERWISE SPECIFIED.
4. BDW: NOT TO EXCEED 0.50 IN A 20 FRAME STRIP.
5. CROSS BDW: NOT TO EXCEED 0.20 TO 36.08 WIDTH.
6. TWIST: 0.50 MAX. IN A FRAME STRIP.
7. CAMBER: LESS THAN 0.10 WHEN MEASURE OVER 20 POSITIONS.
8. TWISTING ANGLE: ±2° MAX. OF THE BDWL.
9. TOLERANCE: IS ±0.10 UNLESS OTHERWISE SPECIFIED.

B180000A	UNPLATING, REEL
B186000A	AG±80µ"/T50µ" REEL
B186C20A	AG±80µ"/T50µ" 20PIN

ANGLES 0°±20°	M/V	DR	J.S.SHEU	DATE	01/02/07	MAT'L	SEE NOTE 1
	0.0±0.13	CHK	J.S.SHEU		01/02/07	FINISH	SEE NOTE 2
	0.00±0.05	ENGR				DWG. NO.	M05041
	0.000±0.03	APPD					



CHAIN PRECISION INDUSTRIAL CO., LTD.

TITLE 2003M8 REV B

SCALE 1:1 SIZE A4 PART. NO. E05041-B18XXXXA SH1 OF 1

A B C D E F G H I