


A		B		C		D		E		F		G		H		I	
TABLE UNPLATING REEL	PLATING	PART NO.	DESCRIPTION		UNDERPLATING	PLATING	PIECE										
1	42-36066-001	32-36066-001	32-36066-002	CU FLASH	AG ± 80 μ" / T 50 μ"	20 PIN											

REVISION			
REV	DESCRIPTION	BY	DATE
A	NEW DRAWING	Ted	9/23/10'

SCATLON "C-C" S=15/1

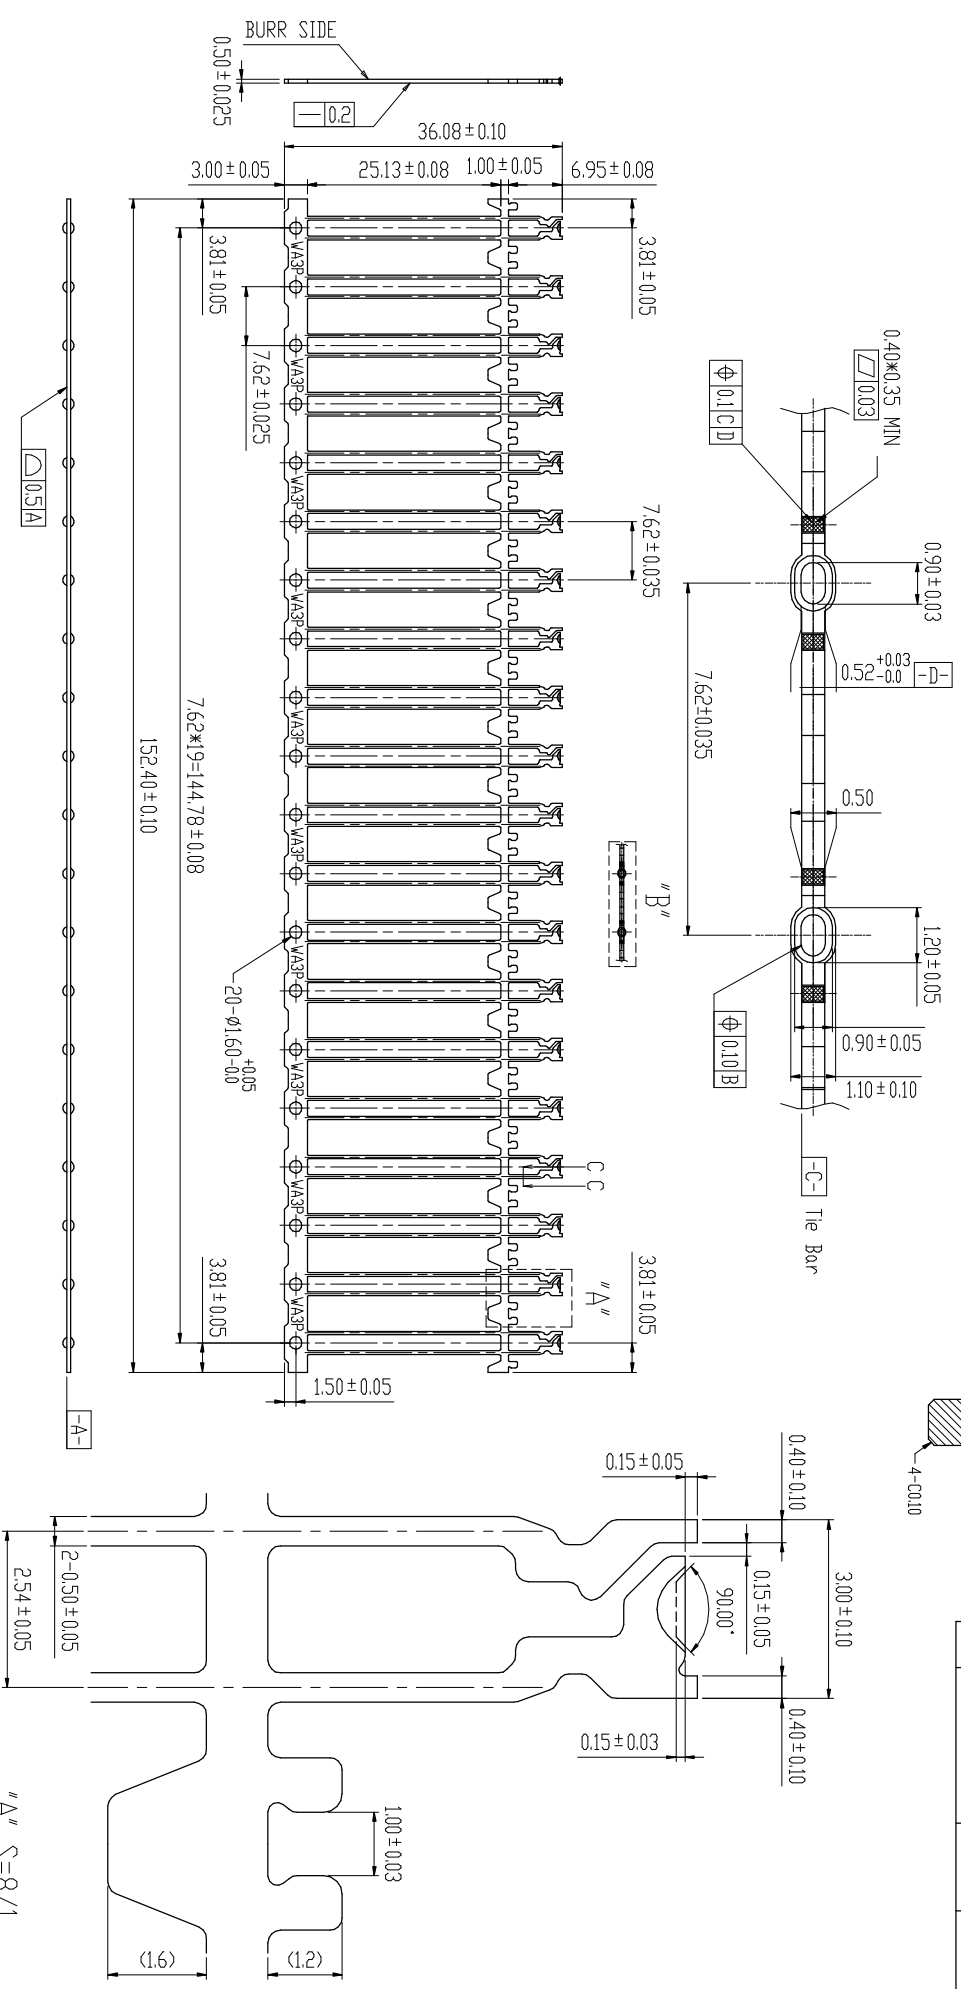

- NOTE:
1. MATERIAL: 0.50±0.025 THICK SPCC-S/D
 2. BURR: 0.05MAX. UNLESS OTHERWISE SPECIFIED.
 3. RADIUS: 0.30 MAX. ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
 4. BDW: NOT TO EXCEED 0.50 IN A 20 FRAME STRIP.
 5. CROSS BDW: NOT TO EXCEED 0.15 TO 36.08 WIDTHH.
 6. TWIST: 0.15 MAX. IN A FRAME STRIP.
 7. CAMBER: LESS THAN 0.10 WHEN MEASURE OVER 20 POSITIONS.
 8. TWISTING ANGLE: ±2° MAX. OF THE BDW.
 9. TOLERANCE: IS ±0.10 UNLESS OTHERWISE SPECIFIED.

ANGLES 0°±20'		DR	DATE	MAT'L
M/M	Ted	9/23/10'	SEE NOTE 1	
0.0±0.13	CHK		FINISH	SEE NOTE 2
0.00±0.05	ENGR		DWG. NO.	M06066
0.000±0.03	APPD			

CHAIN PRECISION INDUSTRIAL CO., LTD.			
DWG. TYPE	SCALE	SIZE	PART. NO.
C	1:1	A4	2003WA3P
REV	SHT 1 OF 2		
A	32-36066-001		