
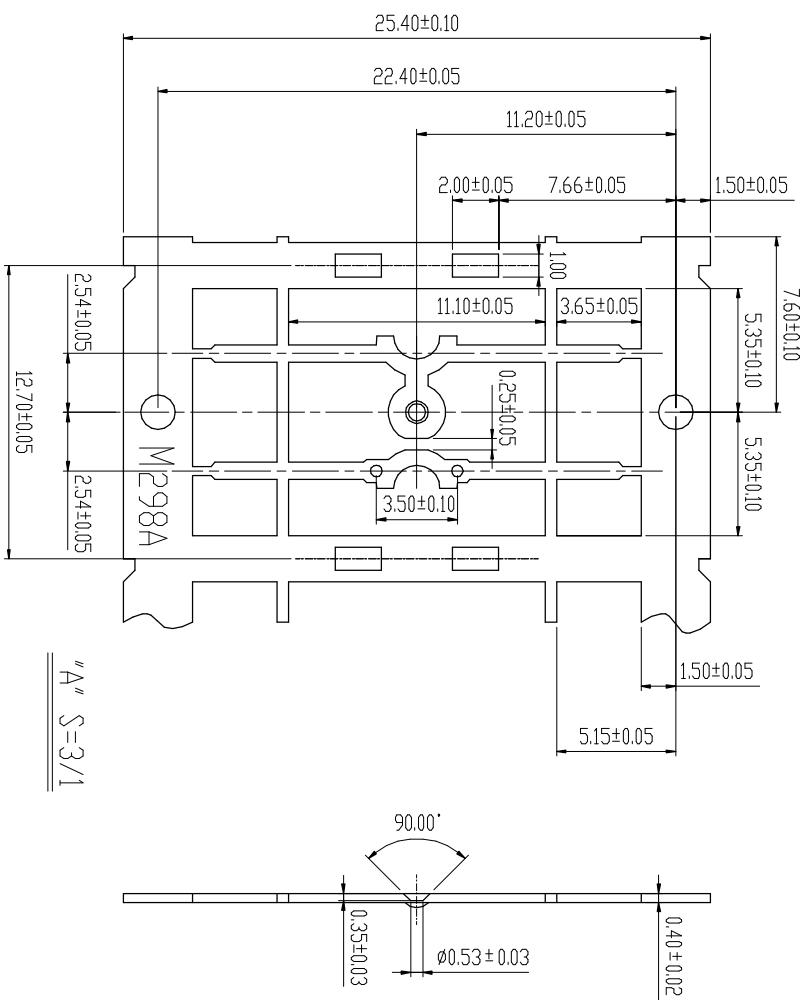


REVISION			
REV	DESCRIPTION	BY	DATE
A	NEW DRAWING	J.S.SHEU	04/07/06
B	MODIFY P/N	J.S.SHEU	01/02/07

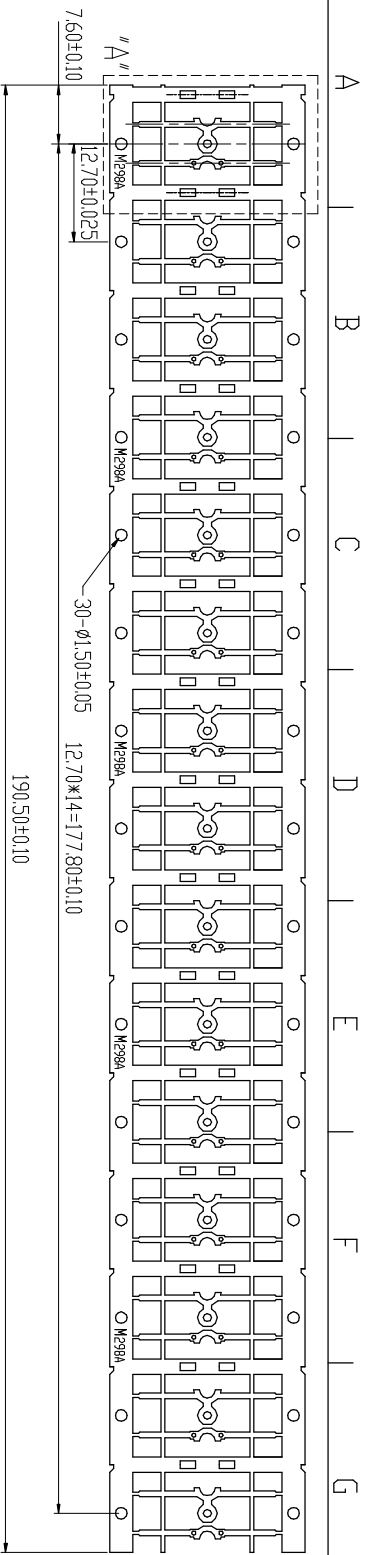

- NOTES:
1. MATERIAL: 04±0.02 THICK ALLOY-194
 2. BURR: 0.05MAX. UNLESS OTHERWISE SPECIFIED.
 3. RADIUS: 0.3MAX ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
 4. BOW: NOT TO EXCEED 0.5 IN A 15 FRAME STRIP.
 5. CROSS BOW: NOT TO EXCEED 0.15 TO 25.4 WIDTH.
 6. TWIST: 0.5MAX. IN A 15 FRAME STRIP.
 7. CAMBER: LESS THAN 0.1 WHEN MEASURED OVER 15 POSITIONS.
 8. TWISTING ANGLE: ±2°MAX. OF THE BOWL.
 9. TOLERANCE: ±0.1 UNLESS OTHERWISE SPECIFIED.

ANGLES 0°±20'		M/M		DR	J.S.SHEU	DATE	01/02/07	MAT'L	SEE NOTE 1
		0.0±0.13	CHK	J.S.SHEU	01/02/07	FINISH	SEE NOTE 2		
		0.00±0.05	ENGR			DWG. NO.	M0346		
		0.000±0.03	APPD						

TITLE			CHALIN PRECISION INDUSTRIAL CO., LTD.		
2041-M298A			REV B		
SCALE	SIZE	PART. NO.			
1:1	A4	E0346-B460000A	SHT 1 OF 1		