
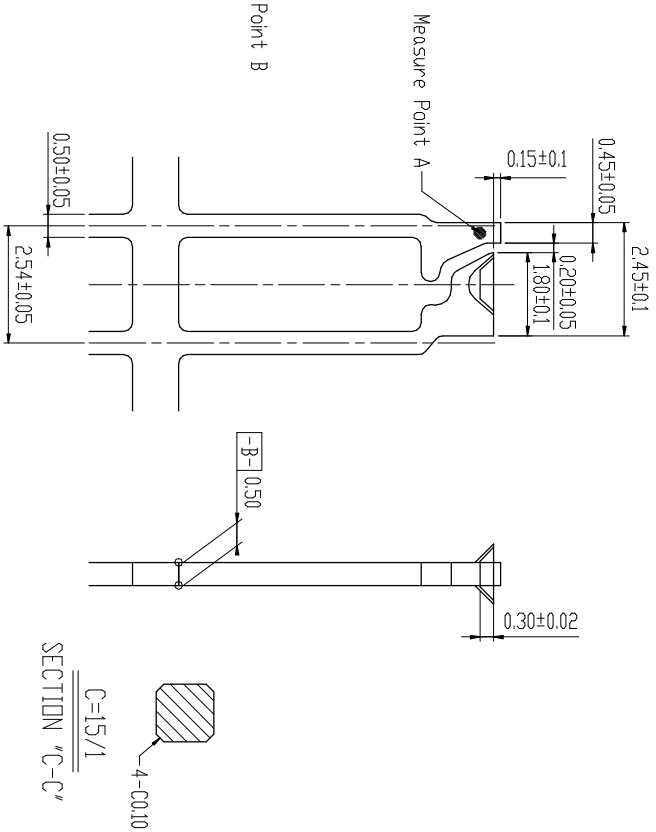


TABLE	UNPLATING/REEL	PLATING	PART NO.	DESCRIPTION			PIECE
1	42-33044-001	32-33044-001	32-33044-002	UNDERPLATING/ A Point	B Point	20PIN	


REVISION			
REV	DESCRIPTION	BY	DATE
A	NEW DRAWING	Ted	11/15/10'

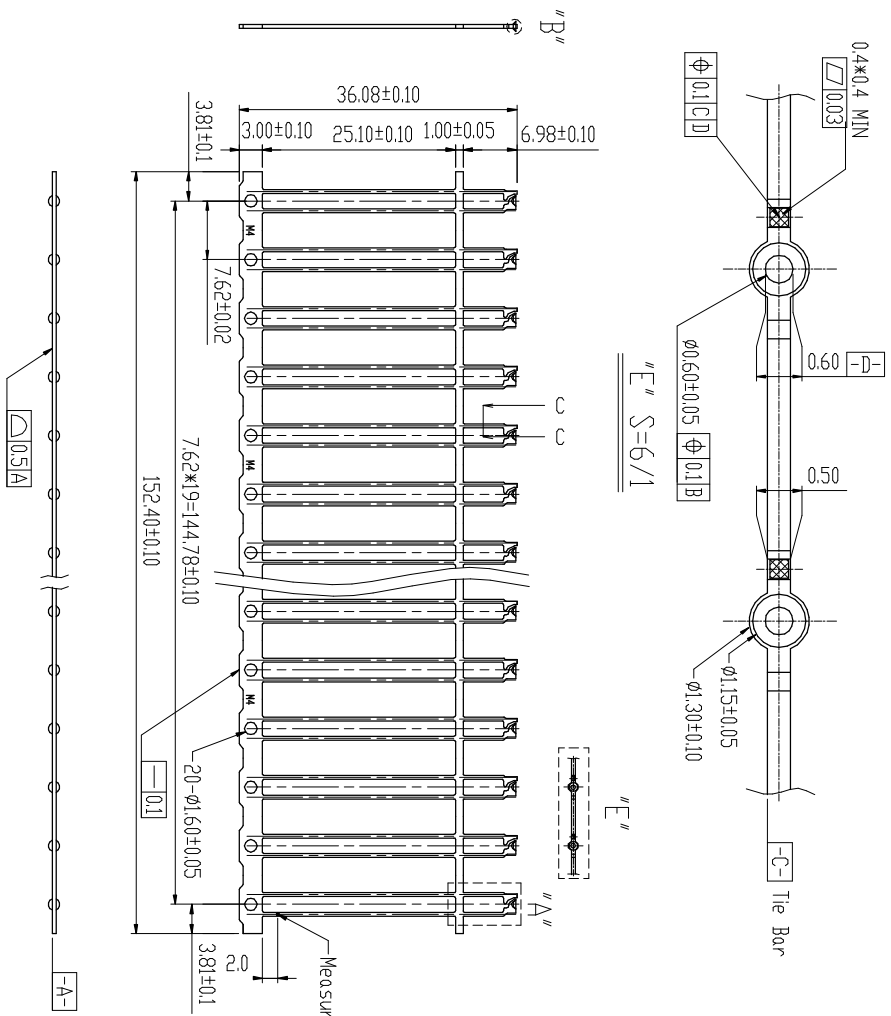

NOTE:

1. MATERIAL: 0.50±0.025 THICK SPCC-SD.
2. BURR: 0.05MAX. UNLESS OTHERWISE SPECIFIED.
3. RADIUS: 0.30 MAX. ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
4. BDW: NOT TO EXCEED 0.50 IN A 20 FRAME STRIP.
5. CROSS BDW: NOT TO EXCEED 0.20 TO 36.08 WIDTHH.
6. TWIST: 0.50 MAX. IN A FRAME STRIP.
7. CAMBER: LESS THAN 0.10 WHEN MEASURE OVER 20 POSITIONS.
8. TWISTING ANGLE: ±2° MAX. OF THE BDWL.
9. TOLERANCE: IS ±0.10 UNLESS OTHERWISE SPECIFIED.

"A" S=6/1



ANGLES 0°±20°	MM	DR	Ted	DATE	MAT'L
0.0±0.13	CHK			11/15/10'	SEE NOTE 1
0.00±0.05	ENGR				FINISH SEE NOTE 2
0.000±0.03	APPD				DWG.NO. M0344

CHALIN PRECISION INDUSTRIAL CO., LTD.

DWG TYPE	TITLE	REV
C	2004M4	A

SCALE	SIZE	PART.NO.	SHT 1 OF 1
1:1	A4	32-33044-002	

A B C D E F G H I